

Lecture at Xidian University
On frontiers of modern optics

Scattering of shaped beam by particles and its applications

III. Description and scattering of shaped beam

Kuan Fang REN

CORIA/UMR 6614 CNRS - Université et INSA de Rouen
School of physics and optoelectronic Eng., Xidian University



西安电子科技大学
现代光学前沿专题

波束散射理论和应用

第三讲：波束描述和散射

任宽芳

法国鲁昂大学 — CORIA研究所
西安电子科技大学物理与光电学院

个人网页：<http://ren.perso.neuf.fr>

电话：中国 8820 2673，法国 02 32 95 37 43



Plan of lecture

- EM field expression of shaped beam
- Expansion of shaped beam
- Formulae of physical quantities
- Examples of calculation and Conclusions

EM expression of a shaped beam

Plane wave – the simplest wave

Propagation along z direction: $\vec{k} = k\hat{z}$

– polarized in x direction:

$$\vec{E} = \hat{x}E_0 e^{-i(\omega t - \vec{k} \cdot \vec{r})}$$

– polarized in y direction:

$$\vec{E} = \hat{y}E_0 e^{-i(\omega t - \vec{k} \cdot \vec{r})}$$

Plane wave: Constant amplitude : $A=E_0$.

Shaped beam: $A = E(x, y, z)$

How to describe a shaped beam?

1. The fields expressions must satisfy the Maxwell equations.
2. The theoretical fields describe as precisely as possible the real fields.

EM expression of a shaped beam

Davis' model:

Cf: K. F. Ren, Thesis

- EM field expressed in vector potential:

$$\mathbf{H} = \frac{1}{\mu} \nabla \times \mathbf{A} \quad \mathbf{E} = -i\omega \left[\mathbf{A} + \frac{1}{k^2} \nabla(\nabla \cdot \mathbf{A}) \right]$$

- Equation of vector potential:

$$\nabla^2 \mathbf{A} + k^2 \mathbf{A} = 0$$

- We suppose for a beam propagating in z direction and polarized in x direction:

$$A_x = \frac{iE_0}{\omega} \psi(x, y, z) \exp(-ikz)$$

$$\psi = \psi_0 + s^2 \psi_2 + s^4 \psi_4 + \dots$$

$$\nabla^2 \psi - 2ik \frac{\partial \psi}{\partial z} = 0$$

To be demonstrated
by yourself

EM expression of a shaped beam

Circular Gaussian beam:

Solution of fundamental mode

$$\psi_0 = iQ \exp\left(-iQ \frac{x^2 + y^2}{w_0^2}\right)$$

$$Q = \frac{1}{i + \frac{2z}{l}}$$

$$s = \frac{w_0}{l} = \frac{1}{kw_0}$$

-Local diameter of the beam:

$$w = w_0 \left(1 + \frac{4z^2}{l^2}\right)^{1/2}$$


-Curvature radius of the beam at z on the axis:

$$R = z \left(1 + \frac{l^2}{4z^2}\right)$$

- Higher orders :

$$\psi_2 = (2iQ + i\rho^4 Q^3) \psi_0$$

$$\psi_4 = (-6Q^2 - 3\rho^4 Q^4 - 2i\rho^6 Q^5 - 0.5\rho^8 Q^6) \psi_0$$

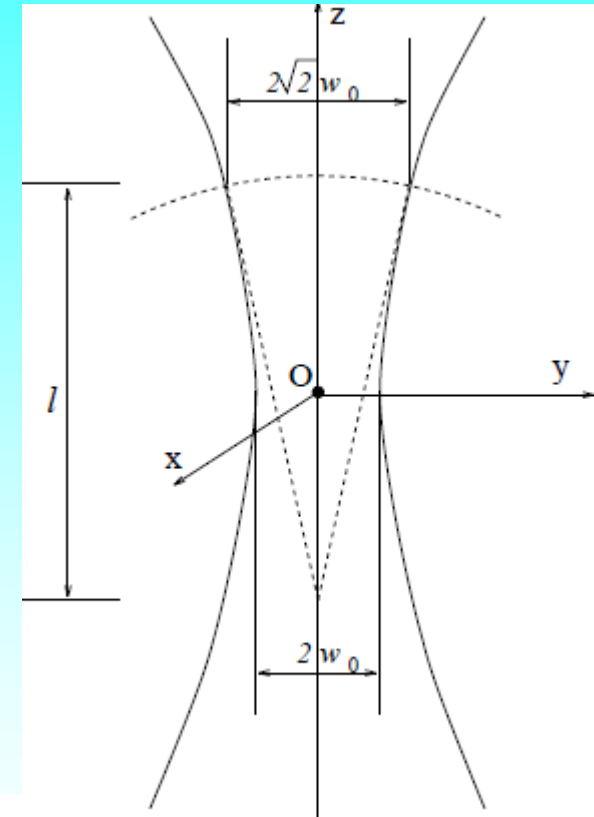

EM expression of a shaped beam

Symmetric EM field of Gaussian beam at 5th order:

$$\begin{aligned}
 E_x &= E_0 \psi_0 \exp(-ikz) \{ 1 + s^2(-\rho^2 Q^2 + i\rho^4 Q^3 - 2Q^2 \xi^2) \\
 &\quad + s^4[+2\rho^4 Q^4 - 3i\rho^6 Q^5 - 0.5\rho^8 Q^6 + (8\rho^2 Q^4 - 2i\rho^4 Q^5)\xi^2] \} \\
 E_y &= E_0 \psi_0 \exp(-ikz) \{ s^2(-2Q^2 \xi \eta) + s^4[(8\rho^2 Q^4 - 2i\rho^4 Q^5)\xi \eta] \} \\
 E_z &= E_0 \psi_0 \exp(-ikz) \{ s(-2Q\xi) + s^3[(+6\rho^2 Q^3 - 2i\rho^4 Q^4)\xi] \\
 &\quad + s^5[(-20\rho^4 Q^5 + 10i\rho^6 Q^6 + \rho^8 Q^7)\xi] \} \\
 H_x &= H_0 \psi_0 \exp(-ikz) \{ s^2(-2Q^2 \xi \eta) + s^4[(8\rho^2 Q^4 - 2i\rho^4 Q^5)\xi \eta] \} \\
 H_y &= H_0 \psi_0 \exp(-ikz) \{ 1 + s^2(-\rho^2 Q^2 + i\rho^4 Q^3 - 2Q^2 \eta^2) \\
 &\quad + s^4[+2\rho^4 Q^4 - 3i\rho^6 Q^5 - 0.5\rho^8 Q^6 + (8\rho^2 Q^4 - 2i\rho^4 Q^5)\eta^2] \} \\
 H_z &= H_0 \psi_0 \exp(-ikz) \{ s(-2Q\eta) + s^3[(+6\rho^2 Q^3 - 2i\rho^4 Q^4)\eta] \\
 &\quad + s^5[(-20\rho^4 Q^5 + 10i\rho^6 Q^6 + \rho^8 Q^7)\eta] \}
 \end{aligned}$$

$$\rho^2 = \xi^2 + \eta^2 \quad \xi = \frac{x}{w_0} \quad \eta = \frac{y}{w_0}$$

Same comment as for Gaussian beam at 2nd order but here O(s⁵)

EM expression of a shaped beam

Elliptical Gaussian beam:

$$\psi_0^{sh} = i\sqrt{Q_x Q_y} \exp\left(-iQ_x \frac{x^2}{w_{0x}^2} - iQ_y \frac{y^2}{w_{0y}^2}\right)$$

$$Q_x = \frac{1}{i + \frac{2z}{l_x}} \quad Q_y = \frac{1}{i + \frac{2z}{l_y}}$$

$$l_x = kw_{0x}^2 \quad l_y = kw_{0y}^2$$


Other solution of the differential equation:

$$\nabla^2 \psi - 2ik \frac{\partial \psi}{\partial z} = 0$$

- Local radii and curvature radii

$$w_x = w_{0x} \left(1 + \frac{4z^2}{l_x^2}\right)^{1/2} \quad R_x = z \left(1 + \frac{l_x^2}{4z^2}\right)$$

$$w_y = w_{0y} \left(1 + \frac{4z^2}{l_y^2}\right)^{1/2} \quad R_y = z \left(1 + \frac{l_y^2}{4z^2}\right)$$

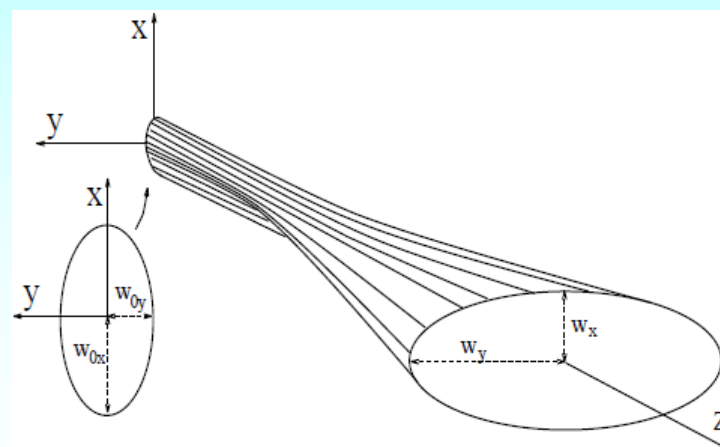

EM expression of a shaped beam


EM fields of a Gaussian beam:

$$A_x = \frac{iE_0}{\omega} \psi(x, y, z) \exp(-ikz)$$

$$\mathbf{E} = -i\omega \left[\mathbf{A} + \frac{1}{k^2} \nabla(\nabla \cdot \mathbf{A}) \right]$$

$$\mathbf{H} = \frac{1}{\mu} \nabla \times \mathbf{A}$$

$$\psi_0 = iQ \exp\left(-iQ \frac{x^2 + y^2}{w_0^2}\right)$$



$$E_x(x, y, z) = E_0 \psi_0 \exp(-ikz)$$

$$E_y(x, y, z) = 0$$

$$E_z(x, y, z) = -\epsilon_L \frac{2Qx}{l} E_x$$

$$H_x(x, y, z) = 0$$

$$H_y(x, y, z) = H_0 \psi_0 \exp(-ikz)$$

$$H_z(x, y, z) = -\epsilon_L \frac{2Qy}{l} H_y$$

- Paraxial **APPROXIMATION**: $O(s^2)$.
- This field does **NOT** satisfies the Maxwell equations in strict sense.
- The approximation depends on the position in the beam.
- cf. Gouesbet J. Opt. 1985 for circular Gaussian beam

EM expression of a shaped beam

EM field of an elliptical Gaussian beam:

$$\psi_0^{sh} = i\sqrt{Q_x Q_y} \exp\left(-iQ_x \frac{x^2}{w_{0x}^2} - iQ_y \frac{y^2}{w_{0y}^2}\right)$$

$$Q_x = \frac{1}{i + \frac{2z}{l_x}} \quad Q_y = \frac{1}{i + \frac{2z}{l_y}}$$

$$E_x(x, y, z) = E_0 \psi_0^{sh} \exp(-ikz)$$

$$E_y(x, y, z) = 0$$

$$E_z(x, y, z) = -\frac{2Q_x x}{l_x} E_x$$

$$H_x(x, y, z) = 0$$

$$H_y(x, y, z) = H_0 \psi_0^{sh} \exp(-ikz)$$

$$H_z(x, y, z) = -\frac{2Q_y y}{l_y} H_y$$

- This is the EM field of linearly polarized (along x axis) Gaussian beam.
- Paraxial APPROXIMATION.
- This field does NOT satisfies the Maxwell equations in strict sense.
- The approximation depends on the position in the beam.
- cf. K.F Ren J. Opt. 1994

EM expression of a shaped beam

EM field of a high order Gaussian beam:

cf: Barton, *Appl. Opt.* 1997

$$TEM_{mn}^x = \frac{\partial^m \partial^n (TEM_{00}^x)}{\partial \xi^m \partial \eta^n}, \quad TEM_{mn}^y = \frac{\partial^m \partial^n (TEM_{00}^y)}{\partial \xi^m \partial \eta^n}$$

$$\xi = \frac{x}{w_0}, \quad \eta = \frac{y}{w_0}.$$

-With the fundamental mode TEM_{00} :

TEM_{00}^x

$$E^{(x)} = E_0 \psi_0 \exp(-ikz) \begin{pmatrix} 1 \\ 0 \\ -2sQ \frac{x}{w_0} \end{pmatrix}$$

$$H^{(x)} = H_0 \psi_0 \exp(-ikz) \begin{pmatrix} 0 \\ 1 \\ -2sQ \frac{y}{w_0} \end{pmatrix}$$

TEM_{00}^y

$$E^{(y)} = E_0 \psi_0 \exp(-ikz) \begin{pmatrix} 0 \\ 1 \\ -2sQ \frac{y}{w_0} \end{pmatrix}$$

$$H^{(y)} = H_0 \psi_0 \exp(-ikz) \begin{pmatrix} -1 \\ 0 \\ 2sQ \frac{x}{w_0} \end{pmatrix}$$

EM expression of a shaped beam

Example: TEM₀₁ and TEM₁₀ mode:

$$\begin{aligned}
 E_{10}^x &= E_0 \exp(-ikz) \begin{pmatrix} \Omega\xi \\ 0 \\ -s\Omega(i + 2Q\xi^2) \end{pmatrix} & H_{10}^x &= H_0 \exp(-ikz) \begin{pmatrix} 0 \\ \Omega\xi \\ -2s\Omega Q\xi\eta \end{pmatrix} \\
 E_{01}^x &= E_0 \exp(-ikz) \begin{pmatrix} \Omega\eta \\ 0 \\ -2s\Omega Q\xi\eta \end{pmatrix} & H_{01}^x &= H_0 \exp(-ikz) \begin{pmatrix} 0 \\ \Omega\eta \\ -s\Omega(i + 2Q\eta^2) \end{pmatrix} \\
 E_{10}^y &= E_0 \exp(-ikz) \begin{pmatrix} 0 \\ \Omega\xi \\ -2s\Omega Q\xi\eta \end{pmatrix} & H_{10}^y &= H_0 \exp(-ikz) \begin{pmatrix} -\Omega\xi \\ 0 \\ s\Omega(i + 2Q\xi^2) \end{pmatrix} \\
 E_{01}^y &= E_0 \exp(-ikz) \begin{pmatrix} 0 \\ \Omega\eta \\ -s\Omega(i + 2Q\eta^2) \end{pmatrix} & H_{01}^y &= H_0 \exp(-ikz) \begin{pmatrix} -\Omega\eta \\ 0 \\ 2\Omega Q s\xi\eta \end{pmatrix}
 \end{aligned}$$

$$\Omega = -2iQ\psi_0 = 2Q^2 \exp[-iQ(\xi^2 + \eta^2)]$$


- Same comment as for Gaussian beam but here 2 polarizations (in x and y direction).
- Other polarization EM field can be constructed from these EM.

EM expression of a shaped beam

Doughnut beam:


- Radial:

$$\begin{aligned} E_{dn}^{rad} &= \frac{E_0}{\sqrt{2}} \exp(-ikz) \begin{pmatrix} \Omega\xi \\ \Omega\eta \\ -2\Omega s [i + Q(\xi^2 + \eta^2)] \end{pmatrix} \\ H_{dn}^{rad} &= \frac{H_0}{\sqrt{2}} \exp(-ikz) \begin{pmatrix} -\Omega\eta \\ \Omega\xi \\ 0 \end{pmatrix} \end{aligned}$$




- Angular:

$$\begin{aligned} E_{dn}^{ang} &= \frac{E_0}{\sqrt{2}} \exp(-ikz) \begin{pmatrix} \Omega\eta \\ -\Omega\xi \\ 0 \end{pmatrix} \\ H_{dn}^{ang} &= \frac{H_0}{\sqrt{2}} \exp(-ikz) \begin{pmatrix} \Omega\xi \\ \Omega\eta \\ -2\Omega s [i + Q(\xi^2 + \eta^2)] \end{pmatrix} \end{aligned}$$




- Arc:

$$\begin{aligned} E_{dn}^{arc} &= \frac{E_0}{\sqrt{2}} \exp(-ikz) \begin{pmatrix} \Omega\xi \\ -\Omega\eta \\ 2\Omega Q s (\eta^2 - \xi^2) \end{pmatrix} \\ H_{dn}^{arc} &= \frac{H_0}{\sqrt{2}} \exp(-ikz) \begin{pmatrix} \Omega\eta \\ \Omega\xi \\ -4\Omega Q s \xi \eta \end{pmatrix} \end{aligned}$$



- helix:

$$\begin{aligned} E_{dn}^{hel} &= \frac{E_0}{\sqrt{2}} \exp(-ikz) \begin{pmatrix} \Omega(\xi + i\eta) \\ 0 \\ -\Omega s [i + 2Q\xi(\xi + i\eta)] \end{pmatrix} \\ H_{dn}^{hel} &= \frac{H_0}{\sqrt{2}} \exp(-ikz) \begin{pmatrix} 0 \\ \Omega(\xi + i\eta) \\ \Omega s [1 - 2Q\eta(\xi + i\eta)] \end{pmatrix} \end{aligned}$$



EM expression of a shaped beam

EM field of a Bessel beam


$$\mathbf{E}(\mathbf{r}) = \mathbf{e}_x E_0 J_v(k_\rho \rho_G) e^{iv\phi_G} e^{-ik_z(z-z_0)}$$

$$\mathbf{H}(\mathbf{r}) = \mathbf{e}_y H_0 J_v(k_\rho \rho_G) e^{iv\phi_G} e^{-ik_z(z-z_0)}$$

$$\rho_G = \sqrt{\rho^2 + \rho_0^2 - 2\rho\rho_0 \cos(\phi - \phi_0)}$$

$$\phi_G = \tan^{-1} \left(\frac{\rho \sin \phi - y_0}{\rho \cos \phi - x_0} \right)$$

R. X. Li et al, *JQSRT* 2012

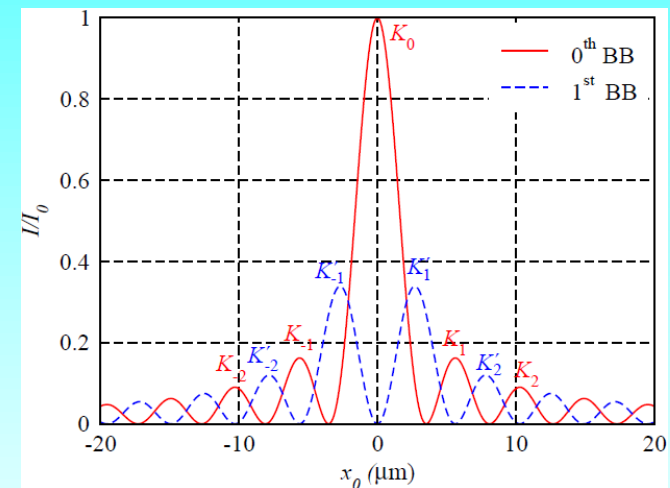


where $k_\rho = k \sin \alpha_0$ and $k_z = k \cos \alpha_0$ with $k = 2\pi/\lambda$.

- Bessel function is a non-diffractive beam.
- α_0 is the angle of axicon.
- Amplitude is independent of z .

EM expression of a shaped beam

Hermite-Gauss beam:


$$\Psi_{mn}(x, y, z) = \frac{w_0}{w(z)} H_m\left(\frac{\sqrt{2}x}{w(z)}\right) H_n\left(\frac{\sqrt{2}y}{w(z)}\right) \exp\left(-\frac{r^2}{w(z)^2}\right) \exp(-i\phi_{mn}(r, z))$$

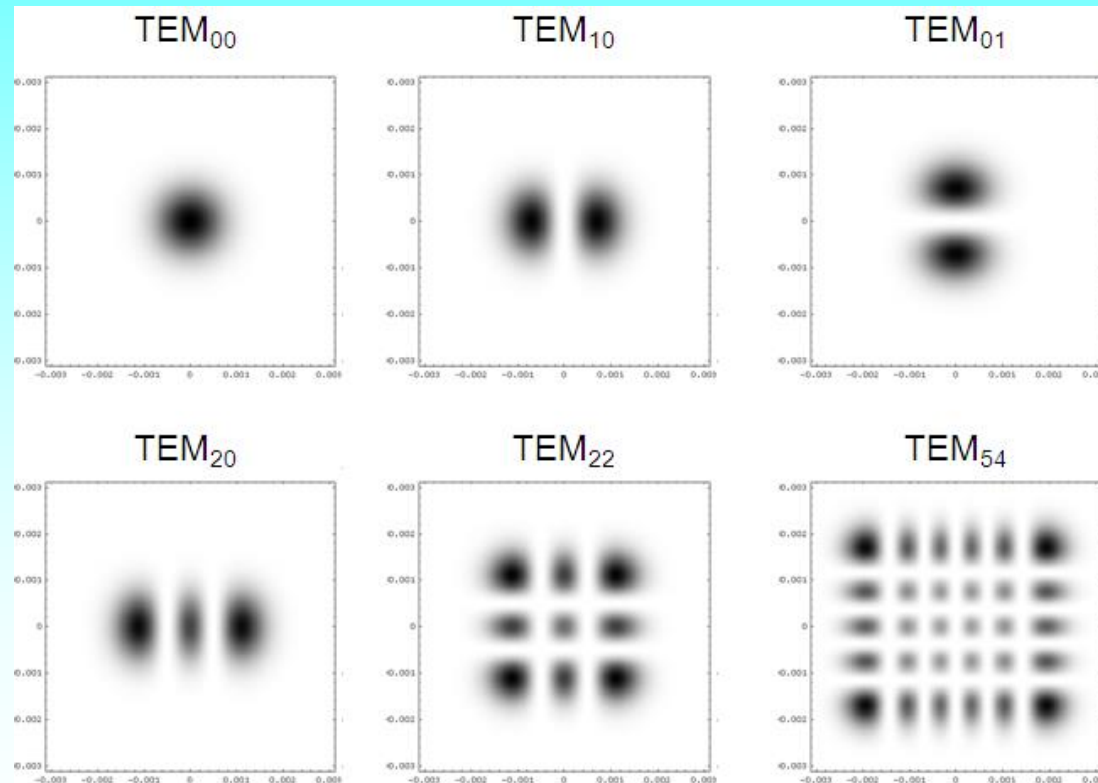

EM expression of a shaped beam

Laguerre-Gauss beam:

$$\Psi_{pl}(r, \theta, z) = \frac{w_0}{w(z)} \left(\frac{\sqrt{2}r}{w(z)} \right)^l L_p^l \left(\frac{2r^2}{w(z)^2} \right) \exp \left(-\frac{r^2}{w(z)^2} - i\phi_{pl}(r, z) \right) \times \begin{cases} \cos l\theta \\ \sin l\theta \end{cases}$$

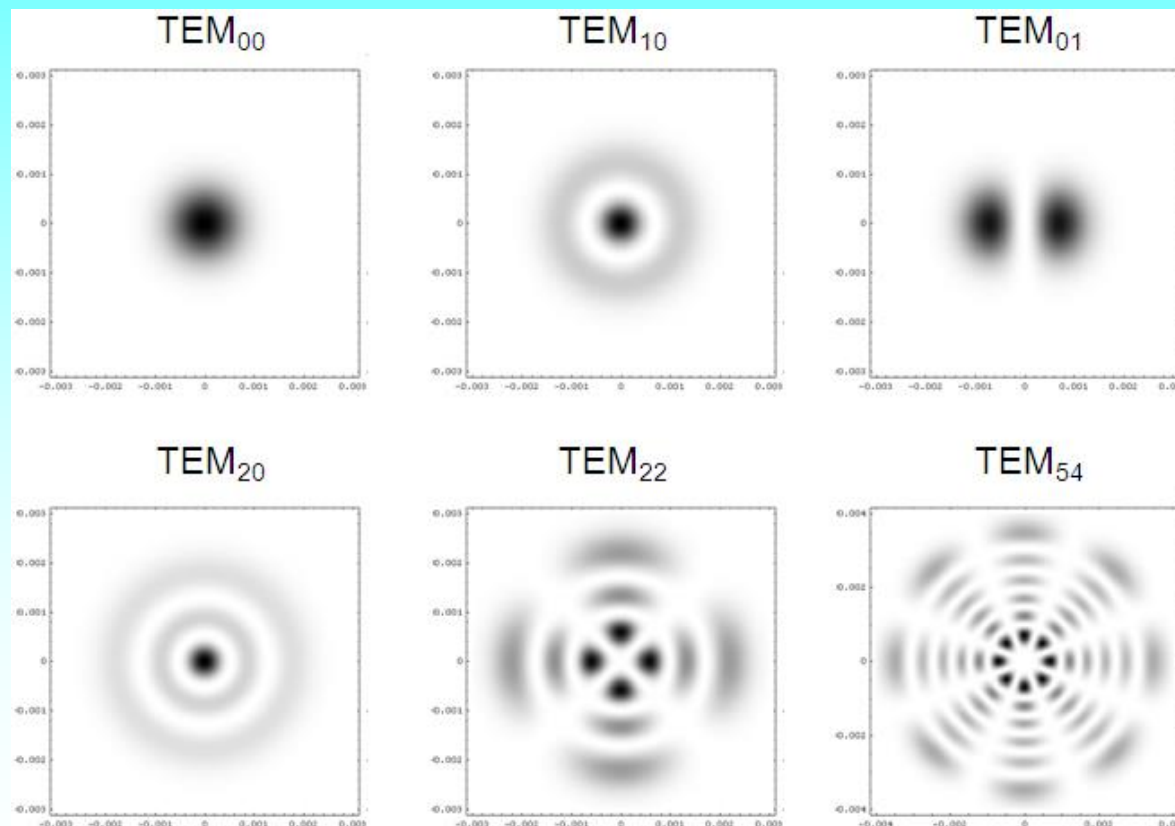

Expansion of shaped beam

1. In spherical system

Solution:

$$\psi_{mn}(r, \theta, \phi) = z_n(kr) P_n^m(\cos \theta) \exp(-im\phi)$$

Any wave can be expanded as summation of these spherical functions (similar as Fourier transform).

- $z_n(kr)$ is a spherical Bessel function.

when $kr \rightarrow \infty$, $e^{\pm ikr}/kr$. So a spherical wave.

- $P_n^m(\cos \theta)$ is the associate Legendre function.

For a plane wave or an axis symmetric wave (ex. circular Gaussian beam), only $m=1$ is necessary, so Legendre function $P_n(\cos \theta)$.

- The index n is from 1 to infinity, describing mainly the variation in r .
- The index m from $-n$ to n , describes the symmetry of the beam.

Therefore, for a shaped beam m takes not only 1 but also other values depending on its symmetry.

Expansion of shaped beam

Beam shape coefficients in spherical system:

$$\vec{E}_i = E_0 \sum_{n=1}^{\infty} \sum_{m=-n}^n C_n^{pw} \left[g_{n, TM}^m \vec{n}_{mn} - i g_{n, TE}^m \vec{m}_{mn} \right]$$

$$\vec{H}_i = H_0 \sum_{n=1}^{\infty} \sum_{m=-n}^n C_n^{pw} \left[g_{n, TE}^m \vec{n}_{mn} + i g_{n, TM}^m \vec{m}_{mn} \right]$$

$$E_r(r, \theta, \phi) = \sum_{n=1}^{\infty} \sum_{m=-n}^n \frac{E_0}{kr} (-i)^{n+1} (2n+1) g_{n, TM}^m j_n(kr) P_n^{|m|}(\cos \theta) \exp(im\phi)$$

$$H_r(r, \theta, \phi) = \sum_{n=1}^{\infty} \sum_{m=-n}^n \frac{E_0}{kr} (-i)^{n+1} (2n+1) g_{n, TE}^m j_n(kr) P_n^{|m|}(\cos \theta) \exp(im\phi)$$

$$\int_0^{2\pi} \exp(im\phi) \exp(-im'\phi) d\phi = \begin{cases} 2\pi & m = m' \\ 0 & m \neq m' \end{cases}$$

$$\int_0^{\pi} P_n^m(\cos \theta) P_l^m(\cos \theta) \sin \theta d\theta = \frac{2}{2n+1} \frac{(n+m)!}{(n-m)!} \delta_{nl}$$

Expansion of shaped beam

Beam shape coefficients in spherical system:

To be demonstrated
by yourself

$$g_{n,TM}^m = \frac{kri^{n+1}}{4\pi j_n(kr)} \frac{(n-|m|)!}{(n+|m|)!} \int_0^{2\pi} \int_0^\pi \frac{E_r(r, \theta, \phi)}{E_0} P_n^{|m|}(\cos \theta) \exp(-im\phi) \sin \theta d\theta d\phi$$

$$g_{n,TE}^m = \frac{kri^{n+1}}{4\pi j_n(kr)} \frac{(n-|m|)!}{(n+|m|)!} \int_0^{2\pi} \int_0^\pi \frac{H_r(r, \theta, \phi)}{H_0} P_n^{|m|}(\cos \theta) \exp(-im\phi) \sin \theta d\theta d\phi$$

- The beam shape coefficients depend explicitly on r but they should not.
 - When the EM field satisfies the Maxwell equations they do not depend on r . Ex. Plane wave.
 - The choice of r has nothing to do with the particle.
 - The dependence on r can be eliminated by integration over r → purification of the beam.

Expansion of shaped beam

Beam shape coefficients in spherical system:

- Triple integration:

$$\int_0^\infty j_n(x) j_n'(x) dx = \frac{\pi}{2(2n+1)} \delta_{nn'}$$

$$g_{n,TM}^m = \frac{2n+1}{2\pi^2} \frac{(n-|m|)!}{(-i)^{n+1} (n+|m|)!}$$

$$\times \int_0^\infty kr \psi_n^{(1)}(kr) \int_0^{2\pi} \exp(-im\phi) \int_0^\pi \frac{E_r(r, \theta, \phi)}{E_0} P_n^{|m|}(\cos \theta) \sin \theta d\theta d\phi d(kr)$$

To be demonstrated
by yourself

- Axial symmetric beam:

$$g_n = \frac{i^{n+1} k a_s}{2n(n+1) \psi_n^{(1)}(k a_s)} \int_0^\pi \frac{E_r(a_s, \theta)}{E_0} P_n^1(\cos \theta) \sin \theta d\theta$$

$$g_n = \frac{(2n+1) i^{n+1}}{\pi n(n+1)} \int_0^\infty kr \psi_n^{(1)}(kr) \int_0^\pi \frac{E_r(r, \theta)}{E_0} P_n^1(\cos \theta) \sin \theta d\theta d(kr)$$

Very **stable** and **flexible** but very **time consuming**.

Expansion of shaped beam

Beam shape coefficients in spherical system:

Localized approximation (see van de Huslt for the principle):

E_r at the plane $z=0$:

$$\theta = \pi/2 \text{ and } kr = n + 1/2$$

To be understood:
localization principle.

$$g_{n,TM}^m = \frac{Z_n^m}{2\pi E_0} \int_0^{2\pi} \overline{E}_r(kr = n + \frac{1}{2}, \theta = \frac{\pi}{2}, \phi') \exp(-im\phi') d\phi'$$

$$g_{n,TE}^m = \frac{Z_n^m}{2\pi H_0} \int_0^{2\pi} \overline{H}_r(r = \rho_n, \theta = \frac{\pi}{2}, \phi') \exp(-im\phi') d\phi'$$

$$Z_n^0 = \frac{2n(n+1)}{2n+1}$$

$$Z_n^m = \left(\frac{-2i}{2n+1} \right)^{|m|-1}, \quad m \neq 0$$

Expansion of shaped beam

Beam shape coefficients in spherical system:

Localized approximation for Gaussian beam:

Reformulated by K. F. Ren (PPSC 1994)

$$g_{n,TM}^m = Z_n^m \exp(ikz_0) \bar{\psi}_0^{-0sh} \frac{1}{2} \sum_{j=0}^{\infty} \frac{\bar{B}^{j+m-1} \bar{C}^j}{j!(j+m-1)!} \left(1 + \frac{\bar{B}^2}{(j+m)(j+m+1)} \right)$$

$$g_{n,TE}^m = Z_n^m \exp(ikz_0) \bar{\psi}_0^{-0sh} \frac{1}{2i} \sum_{j=0}^{\infty} \frac{\bar{B}^{j+m-1} \bar{C}^j}{j!(j+m-1)!} \left(1 - \frac{\bar{B}^2}{(j+m)(j+m+1)} \right)$$

$$\bar{B} = \rho_n \frac{iQ}{w_0^2} (x_0 - iy_0)$$

$$\bar{C} = \rho_n \frac{iQ}{w_0^2} (x_0 + iy_0)$$

Widely used but not numerically stable.

Expansion of shaped beam

Beam shape coefficients in spherical system:

Integral localized approximation (Introduced by Ren (JOSA A 1996))

$$g_{n,TM}^m = \frac{Z_n^m}{2\pi E_0} \int_0^{2\pi} \bar{E}_r(kr = n + \frac{1}{2}, \theta = \frac{\pi}{2}, \phi') \exp(-im\phi') d\phi'$$

$$g_{n,TE}^m = \frac{Z_n^m}{2\pi H_0} \int_0^{2\pi} \bar{H}_r(r = \rho_n, \theta = \frac{\pi}{2}, \phi') \exp(-im\phi') d\phi'$$

Applicable to any shaped beam propagating along z axis:

Applied to Gaussian beam:

$$\begin{pmatrix} g_{n,TM}^m \\ ig_{n,TE}^m \end{pmatrix} = iQ \frac{Z_n^m}{4\pi} e^{-iQ\gamma^2 + ikz_0} \int_0^{2\pi} e^{2iQ\rho_n(\xi_0 \cos \phi + \eta_0 \sin \phi)} \left(e^{-i(m-1)\phi} \pm e^{-i(m+1)\phi} \right) d\phi$$

$$= iQ \frac{Z_n^m}{2} e^{-iQ\gamma^2 + ikz_0} \left[e^{i(m-1)\phi_0} J_{m-1}(2Q\rho_n\rho_0) \pm e^{i(m+1)\phi_0} J_{m+1}(2Q\rho_n\rho_0) \right]$$

No problem of instability.

Expansion of shaped beam

Beam shape coefficients in spherical system:

Applied to Doughnut beam (similar for other polarizations):

$$g_{n,TM}^{m,rad} = \frac{1}{2} Z_n^m \bar{\Omega}_n e^{im\phi_0} [2\rho_n J_m(x_n) - \rho_0 (J_{m-1} e^{-2i\phi_0} + J_{m+1} e^{2i\phi_0})]$$

$$g_{n,TE}^{m,rad} = \frac{i}{2} Z_n^m \bar{\Omega}_n e^{im\phi_0} \rho_0 (J_{m-1} e^{-2i\phi_0} - J_{m+1} e^{2i\phi_0})$$

Applied to Bessel beam:

$$g_{n,TM}^0 = \frac{Z_n^0}{2} [J_1(\varpi) J_{1-v}(\xi) e^{-i\phi_0} + J_{-1}(\varpi) J_{-1-v}(\xi) e^{i\phi_0}] e^{ik \cos \alpha_0 z_0}$$

$$g_{n,TM}^m = \frac{Z_n^m}{2} [J_{1+m}(\varpi) J_{1+m-v}(\xi) e^{-i(1+m)\phi_0} + J_{-1+m}(\varpi) J_{-1+m-v}(\xi) e^{-i(-1+m)\phi_0}] e^{ik \cos \alpha_0 z_0}$$

$$g_{n,TE}^0 = \frac{Z_n^0}{2} [iJ_1(\varpi) J_{1-v}(\xi) e^{-i\phi_0} - iJ_{-1}(\varpi) J_{-1-v}(\xi) e^{i\phi_0}] e^{ik \cos \alpha_0 z_0}$$

$$g_{n,TE}^m = \frac{iZ_n^m}{2} [J_{1+m}(\varpi) J_{1+m-v}(\xi) e^{-i(1+m)\phi_0} - J_{-1+m}(\varpi) J_{-1+m-v}(\xi) e^{-i(-1+m)\phi_0}] e^{ik \cos \alpha_0 z_0}$$

Expansion of shaped beam

2. In spheroidal system:

Solution:

$$\psi_{mn}(\eta, \xi, \phi) = S_{|m|n}(c, \eta) R_{|m|n}(c, \xi) e^{im\phi}$$

Any wave can be expanded as summation of these spheroidal functions

- $S_{|m|n}(c, \eta)$ and $R_{|m|n}(c, \xi)$ are respectively the angular and radial spheroidal function.
- $c=kf$ with f being the semifocal length of the spheroid

- It is more correct to write EM in M_{mn} and N_{mn} than odd and even separated.
- The computation of the spheroidal functions is much more difficulty, so application limited.

Expansion of shaped beam

Beam shape coefficients in spheroidal system:

EM field in spherical system:

$$\mathbf{E}^{(i)} = \sum_{m=-\infty}^{+\infty} \sum_{n=|m|, n \neq 0}^{+\infty} c_{n,pw} i^{n+1} \left(i g_{n,TE}^m \mathbf{m}_{mn}^{(i)}(r, \theta, \phi) + g_{n,TM}^m \mathbf{n}_{mn}^{(i)}(r, \theta, \phi) \right),$$

$$\mathbf{H}^{(i)} = -\frac{ik_1}{\omega\mu_0} \sum_{m=-\infty}^{+\infty} \sum_{n=|m|, n \neq 0}^{+\infty} c_{n,pw} i^{n+1} \left(g_{n,TM}^m \mathbf{m}_{mn}^{(i)}(r, \theta, \phi) + i g_{n,TE}^m \mathbf{n}_{mn}^{(i)}(r, \theta, \phi) \right)$$

EM field in spheroid system:

$$\mathbf{E}^{(i)} = \sum_{m=-\infty}^{\infty} \sum_{n=|m|, n \neq 0}^{\infty} i^{n+1} \left[i G_{n,TE}^m \mathbf{M}_{mn}^{(i)}(c_1; \xi, \eta, \phi) + G_{n,TM}^m \mathbf{N}_{mn}^{(i)}(c_1; \xi, \eta, \phi) \right],$$

$$\mathbf{H}^{(i)} = -\frac{ik_1}{\omega\mu_0} \sum_{m=-\infty}^{\infty} \sum_{n=|m|, n \neq 0}^{\infty} i^{n+1} \left[G_{n,TM}^m \mathbf{M}_{mn}^{(i)}(c_1; \xi, \eta, \phi) + i G_{n,TE}^m \mathbf{N}_{mn}^{(i)}(c_1; \xi, \eta, \phi) \right]$$

**Vector potential given in combined form
odd and even functions not separated.**

Expansion of shaped beam

Beam shape coefficients in spheroidal system:

Relation between the vector wave functions in the two systems:

$$\mathbf{n}_{mn}^{(i)}(r, \theta, \phi) = \sum_{l=|m|, |m|+1}^{\infty} \frac{2(n+|m|)!}{(2n+1)(n-|m|)!} \frac{i^{l-n}}{N_{|m|l}} d_{n-|m|}^{|m|l} \mathbf{N}_{ml}^{(i)}(c; \xi, \eta, \phi)$$

$$\mathbf{m}_{mn}^{(i)}(r, \theta, \phi) = \sum_{l=|m|, |m|+1}^{\infty} \frac{2(n+|m|)!}{(2n+1)(n-|m|)!} \frac{i^{l-n}}{N_{|m|l}} d_{n-|m|}^{|m|l} \mathbf{M}_{ml}^{(i)}(c; \xi, \eta, \phi)$$

Beam shape coefficients:

$$G_{n,TE}^m = \frac{1}{N_{|m|n}(c_1)} \sum_{r=0,1}^{\infty} g_{r+|m|,TE}^m \frac{2(r+2|m|)!}{(r+|m|)(r+|m|+1)r!} d_r^{|m|n}(c_1)$$

$$G_{n,TM}^m = \frac{1}{N_{|m|n}(c_1)} \sum_{r=0,1}^{\infty} g_{r+|m|,TM}^m \frac{2(r+2|m|)!}{(r+|m|)(r+|m|+1)r!} d_r^{|m|n}(c_1)$$

gnm can not be calculated by Localized approximation
for *oblique incidence*.

Expansion of shaped beam

3. In cylindrical system:

Solution:

$$\psi_{hn}(r, \phi, z) = Z_n(\rho) e^{in\phi} e^{ihz}$$

Any wave can be expanded as summation of these cylindrical wave functions (similar as Fourier transform).

- $Z_n(\rho)$ is a cylindrical Bessel function with

$$\rho = r\sqrt{k^2 - h^2} = kr \cos \alpha$$

- When $kr \rightarrow \infty$, $e^{\pm ikr}/\sqrt{kr}$. So a cylindrical wave.
- The index n is from 1 to infinity, describing mainly the variation in r .
- α can be considered as incident angle (of a plane wave) to the cylinder.

A shaped beam can be expanded in plane wave by taking α as the index m in the scattering of a sphere.

Expansion of shaped beam

Beam shape coefficients in cylindrical system:

Incident field:

$$E_z^i = \frac{E_0}{\rho^2} \sum_{m=-\infty}^{+\infty} (-i)^m e^{im\phi} \int_{-1}^1 \rho_0^2 I_{m,TM}(\delta) J_m(\rho_0) e^{i\delta\zeta} d\delta$$

$$H_z^i = \frac{H_0}{\rho^2} \sum_{m=-\infty}^{+\infty} (-i)^m e^{im\phi} \int_{-1}^1 \rho_0^2 I_{m,TE}(\delta) J_m(\rho_0) e^{i\delta\zeta} d\delta$$

Beam shape coefficients in integral form:

$$I_{m,TM}(\delta) = \frac{i^m}{4\pi^2(1-\delta^2)J_m(\rho_0)} \int_0^{2\pi} e^{-im\phi} \int_{-\infty}^{+\infty} \frac{E_z^i}{E_0} e^{-i\delta\zeta} d\phi d\zeta$$

$$I_{m,TE}(\delta) = \frac{i^m}{4\pi^2(1-\delta^2)J_m(\rho_0)} \int_0^{2\pi} e^{-im\phi} \int_{-\infty}^{+\infty} \frac{H_z^i}{H_0} e^{-i\delta\zeta} d\phi d\zeta$$

- The beam shape coefficients depend on z components of E, H .
- The second index is continuous – continuous spectrum.

Expansion of shaped beam

Beam shape coefficients in cylindrical system:

Localized approximation:

$$I_{m,TM} = \frac{1}{2\pi E_0} \int_{-\infty}^{\infty} E_z^i(\phi = \frac{\pi}{2}, \rho = m) \exp(-i\delta\zeta) d\zeta$$

$$I_{m,TE} = \frac{1}{2\pi H_0} \int_{-\infty}^{\infty} H_z^i(\phi = \frac{\pi}{2}, \rho = m) \exp(-i\delta\zeta) d\zeta$$

Beam shape coefficients normal incident Gaussian beam:

$$I_{m,TM} = I_{m,TE} = \frac{1}{2\pi H_0} \int_{-\infty}^{\infty} \exp(-s^2 m^2) \exp(-s^2 \zeta^2) \exp(-i\delta\zeta) d\zeta$$

$$= \frac{1}{2\sqrt{\pi}s} \exp\left[-m^2 s^2 - \frac{\delta^2}{4s^2}\right]$$

The beam shape coefficients are Gaussian both on the discrete index m and the continuous index δ .

Formulae of physical quantities

Scattering by a sphere.


1. Internal and near fields:
Formula can be found in the literature.

Practical consideration:

- Continuous at the surface,
- m must be sufficiently great.

Interesting subjects to be studied:

- Check numerically the surface wave.
- Different effects by illuminating with strongly focus beam.

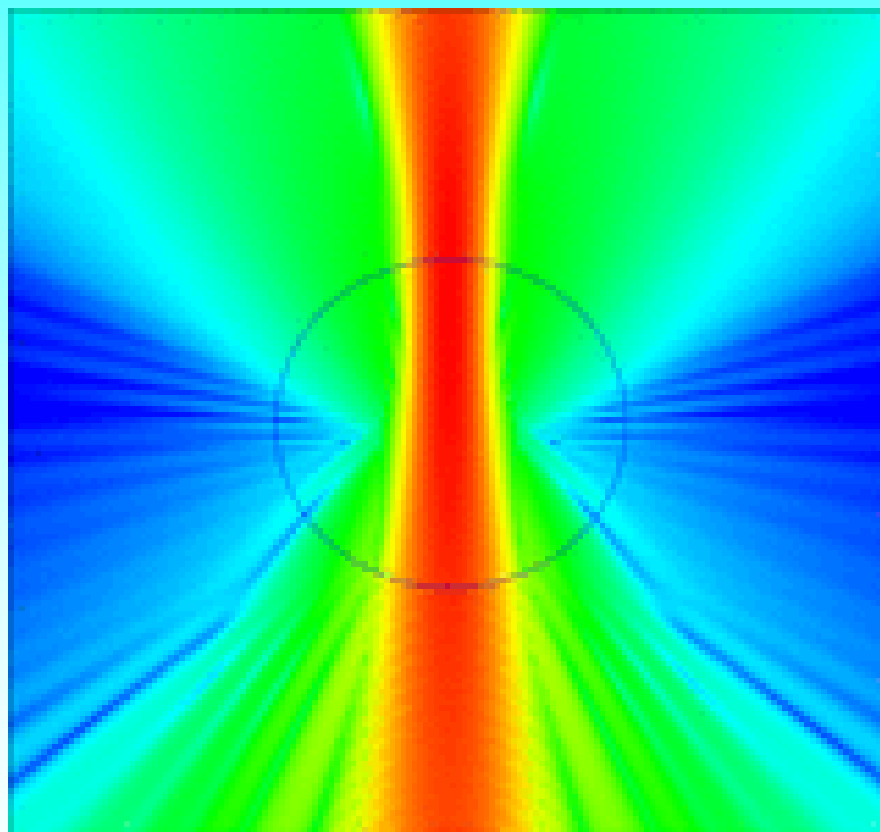

Formulae of physical quantities

Plane wave case:

Incident wave:

$$\begin{pmatrix} \psi_{TM}^i \\ \psi_{TE}^i \end{pmatrix} = \frac{1}{k^2} \sum_{n=1}^{\infty} \frac{1}{i^{n+1}} \frac{2n+1}{n(n+1)} \psi_n(kr) P_n^1(\cos \theta) \begin{pmatrix} \cos \phi \\ \sin \phi \end{pmatrix}$$

Far field:

$$E_r = H_r = 0$$

$$E_\theta = \frac{iE_0}{kr} \exp(-ikr) \cos \phi \sum_{n=1}^{\infty} \frac{2n+1}{n(n+1)} [a_n \tau_n(\cos \theta) + ib_n \pi_n(\cos \theta)] = \frac{iE_0}{kr} \exp(-ikr) \cos \phi S_2$$

$$E_\phi = \frac{-E_0}{kr} \exp(-ikr) \sin \phi \sum_{n=1}^{\infty} \frac{2n+1}{n(n+1)} [a_n \pi_n(\cos \theta) + ib_n \tau_n(\cos \theta)] = \frac{-E_0}{kr} \exp(-ikr) \sin \phi S_1$$

$$H_\phi = \frac{H_0}{E_0} E_\theta$$

$$H_\theta = -\frac{H_0}{E_0} E_\phi$$

a_n, b_n coefficients de diffusion dépendants des propriétés de la particule

τ_n, π_n fonctions angulaire de Legendre

Formulae of physical quantities

Plane wave case:

Scattering intensities:

$$I_{\perp}(q) = |S_1|^2$$

$$I_{\parallel}(q) = |S_2|^2$$

$$S_1 = \sum_{n=1}^{\infty} \frac{2n+1}{n(n+1)} [a_n \pi_n(\cos \theta) + i b_n \tau_n(\cos \theta)]$$

$$S_2 = \sum_{n=1}^{\infty} \frac{2n+1}{n(n+1)} [a_n \tau_n(\cos \theta) + i b_n \pi_n(\cos \theta)]$$

Sections efficaces:

$$C_{ext} = C_{sca} + C_{abs}$$

$$C_{sca} = \frac{\lambda^2}{2\pi} \sum_{n=1}^{\infty} (2n+1) (|a_n|^2 + |b_n|^2)$$

$$C_{ext} = \frac{\lambda^2}{2\pi} \sum_{n=1}^{\infty} (2n+1) \operatorname{Re}(a_n + b_n)$$

Pression de radiation:

$$C_x = C_y = 0$$

$$C_{pr,z} = \frac{\lambda^2}{2\pi} \operatorname{Re} \left[\sum_{n=1}^{\infty} (2n+1) \frac{(a_n + b_n)}{2} - \frac{2n+1}{n(n+1)} a_n b_n^* - \frac{n(n+2)}{n+1} (a_n a_{n+1}^* + b_n b_{n+1}^*) \right]$$

Formulae of physical quantities

Arbitrarily shaped beam:

1. Scattered wave in field:

$$E_{\theta}^s = \frac{iE_0}{kr} \exp(-ikr) \sum_{n=1}^{\infty} \sum_{m=-n}^n \frac{2n+1}{n(n+1)} \left[a_n g_{n, TM}^m \tau_n^{|m|}(\cos \theta) + i m b_n g_{n, TE}^m \tau_n^{|m|}(\cos \theta) \right] \exp(im\phi)$$

$$E_{\phi}^s = \frac{-E_0}{kr} \exp(-ikr) \sum_{n=1}^{\infty} \sum_{m=-n}^n \frac{2n+1}{n(n+1)} \left[m a_n g_{n, TM}^m \pi_n^{|m|}(\cos \theta) + b_n j_{n, TE}^m \tau_n^{|m|}(\cos \theta) \right] \exp(im\phi)$$


$$H_{\phi}^s = \frac{H_0}{E_0} E_{\theta}^s$$

$$H_{\theta}^s = -\frac{H_0}{E_0} E_{\phi}^s$$

$$E_r^s = H_r^s = 0$$

These formula and those given in the following are valid for any “spherical” particle:

- Homogenous,
- Stratified,
- Spherical with inclusion
-

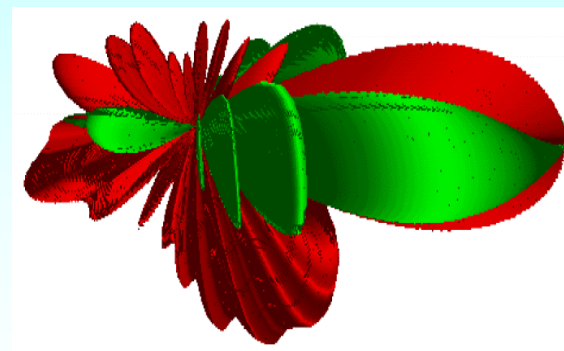

Formulae of physical quantities

Arbitrarily shaped beam:

The extinction, scattering and absorption sections:

$$C_{ext} = \frac{\lambda^2}{\pi} \operatorname{Re} \sum_{n=1}^{\infty} \sum_{m=-n}^n \frac{2n+1}{n(n+1)} \frac{(n+|m|)!}{(n-|m|)!} (a_n |g_{n,TM}^m|^2 + b_n |g_{n,TE}^m|^2)$$

$$C_{sca} = \frac{\lambda^2}{\pi} \sum_{n=1}^{\infty} \sum_{m=-n}^n \frac{2n+1}{n(n+1)} \frac{(n+|m|)!}{(n-|m|)!} (|a_n|^2 |g_{n,TM}^m|^2 + |b_n|^2 |g_{n,TE}^m|^2)$$

$$C_{abs} = C_{ext} - C_{sca}$$

- Double summation : $\sum_{n=1}^{\infty} \sum_{m=-n}^n = \sum_{m=-\infty}^{\infty} \sum_{n=m \neq 0}^{\infty}$
- The sense of the efficiency factors for shaped beam.

Formulae of physical quantities

Arbitrarily shaped beam:

The radiation pressure:

$$A_n = a_n + a_{n+1}^* - 2a_n a_{n+1}^*$$

$$B_n = b_n + b_{n+1}^* - 2b_n b_{n+1}^*$$

$$C_n = -i(a_n + b_{n+1}^* - 2a_n b_{n+1}^*)$$

$$C_{pr,z} = \frac{\lambda^2}{\pi} \sum_{n=1}^{\infty} \operatorname{Re} \left\{ \frac{1}{n+1} (A_n g_{n,TM}^0 g_{n+1,TM}^{0*} + B_n g_{n,TE}^0 g_{n+1,TE}^{0*}) \right. \\ \left. + \sum_{m=1}^n \left[\frac{1}{(n+1)^2} \frac{(n+m+1)!}{(n-m)!} (A_n g_{n,TM}^m g_{n+1,TM}^{m*} + A_n g_{n,TM}^{-m} g_{n+1,TM}^{-m*} \right. \right. \\ \left. \left. + B_n g_{n,TE}^m g_{n+1,TE}^{m*} + B_n g_{n,TE}^{-m} g_{n+1,TE}^{-m*}) \right] \right. \\ \left. + m \frac{2n+1}{n^2(n+1)^2} \frac{(n+m)!}{(n-m)!} C_n (g_{n,TM}^m g_{n,TE}^{m*} - g_{n,TM}^{-m} g_{n,TE}^{-m*}) \right\}$$

$$C_{pr,x} = \operatorname{Re}(C) \quad C_{pr,y} = \operatorname{Im}(C)$$

$$C = \frac{\lambda^2}{2\pi} \sum_{n=1}^{\infty} \left\{ -\frac{(2n+2)!}{(n+1)^2} F_n^{n+1} + \sum_{m=1}^n \frac{(n+m)!}{(n-m)!} \frac{1}{(n+1)^2} \left[F_n^{m+1} - \frac{n+m+1}{n-m+1} F_n^m \right. \right. \\ \left. \left. + \frac{2n+1}{n^2} (C_n g_{n,TM}^{m-1} g_{n,TE}^{m*} - C_n g_{n,TM}^{-m} g_{n+1,TE}^{-m+1*} + C_n^* g_{n,TE}^{m-1} g_{n,TM}^{m*} - C_n^* g_{n,TE}^{-m} g_{n,TM}^{-m+1*}) \right] \right\}$$

$$F_n^m = A_n g_{n,TM}^{m-1} g_{n+1,TM}^{m*} + B_n g_{n,TE}^{m-1} g_{n+1,TE}^{m*} + A_n^* g_{n+1,TM}^{-m} g_{n,TM}^{-m+1*} + B_n^* g_{n+1,TE}^{-m} g_{n,TE}^{-m+1*}$$

- Rewritten for programming.

Formulae of physical quantities

Arbitrarily shaped beam:

The radiation torque:

$$\begin{aligned}
 T_x &= \frac{4\hat{m}}{c} \frac{\pi}{k^3} \sum_{n=1}^{\infty} \sum_{m=1}^n C_n^m \Re(A_n^m), \\
 T_y &= \frac{4\hat{m}}{c} \frac{\pi}{k^3} \sum_{n=1}^{\infty} \sum_{m=1}^n C_n^m \Im(A_n^m), \\
 T_z &= -\frac{4\hat{m}}{c} \frac{\pi}{k^3} \sum_{n=1}^{\infty} \sum_{m=1}^n m C_n^m B_n^m,
 \end{aligned}$$

$$\begin{aligned}
 C_n^m &= \frac{2n+1}{n(n+1)} \frac{(n+|m|)!}{(n-|m|)!} \\
 A_n^m &= A_n \left(g_{n,TM}^{m-1} g_{n,TM}^{m*} - g_{n,TM}^{-m} g_{n,TM}^{-m+1*} \right) + B_n \left(g_{n,TE}^{m-1} g_{n,TE}^{m*} - g_{n,TE}^{-m} g_{n,TE}^{-m+1*} \right) \\
 B_n^m &= A_n \left(|g_{n,TM}^m|^2 - |g_{n,TM}^{-m}|^2 \right) + B_n \left(|g_{n,TE}^m|^2 - |g_{n,TE}^{-m}|^2 \right) \\
 A_n &= \Re(a_n) - |a_n|^2 \\
 B_n &= \Re(b_n) - |b_n|^2
 \end{aligned}$$

- Transversal components null for transparent sphere whatever the form and the position of the beam.

Exemplified results and conclusions

Scattering by a sphere:


Conditions:

1. Incident beam: **Arbitrary shape**
2. Particle :
 - Spherical
 - Homogeneous or stratified
 - Isotropic

Particularities:



1. Illumination inhomogeneous when beam is small.
2. Incident beam is described by two series of beam coefficients :

$$g_{n,TM}^m \quad \text{et} \quad g_{n,TE}^m$$

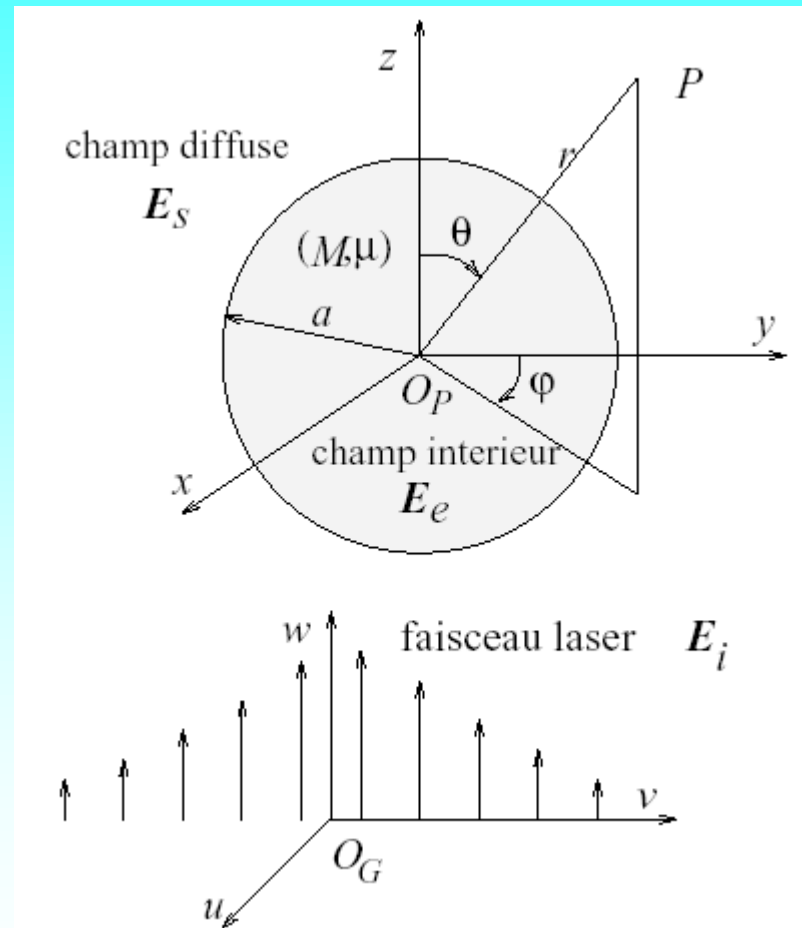

Example results and conclusions

Scattering by a sphere:

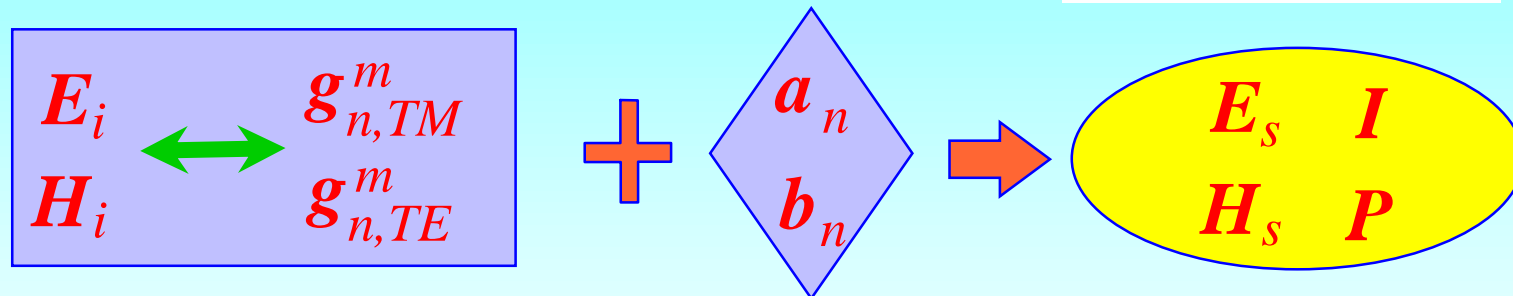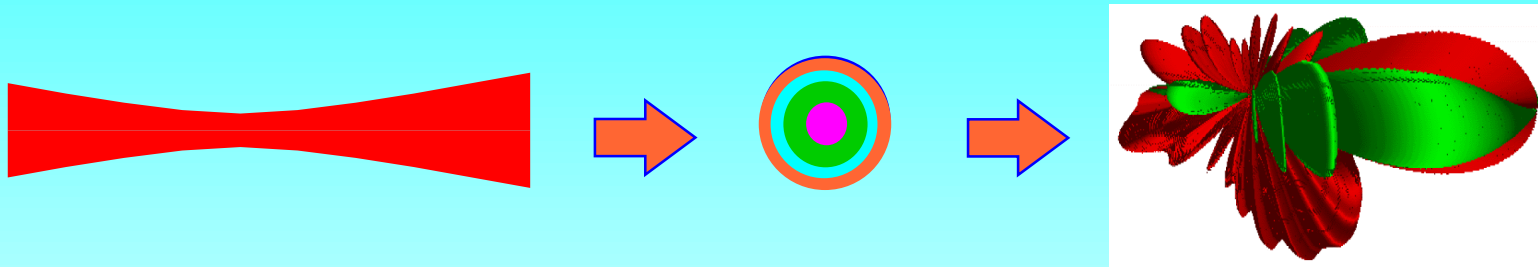

$$a_n \rightarrow a_n g_{n,TM}^m$$

$$b_n \rightarrow b_n g_{n,TE}^m$$

$$\pi_n(\cos \theta) \rightarrow \pi_n^m(\cos \theta)$$

$$\tau_n(\cos \theta) \rightarrow \tau_n^m(\cos \theta)$$

$$\sum_{n=1}^{\infty} \rightarrow \sum_{n=1}^{\infty} \sum_{m=-n}^{m=+n}$$

Exampled results and conclusions

Particule :

$$a = 5 \mu\text{m}$$

$$m = 1.33$$

Faisceau gaussien:


$$\lambda = 0.6328 \mu\text{m}$$

$$w_0 = 5 \mu\text{m}$$


Diagramme de diffusion:

Sur axe - symétrique


Hors axe - non-symétrique

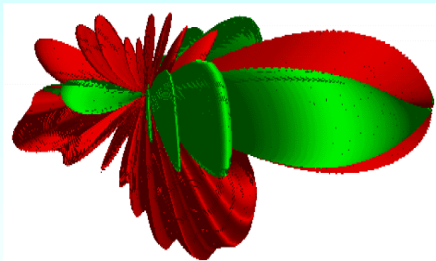


Scattering diagram

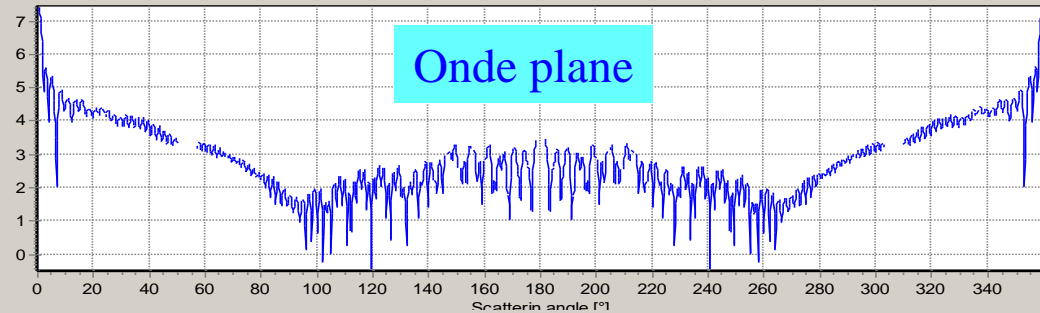

Scattering diagram

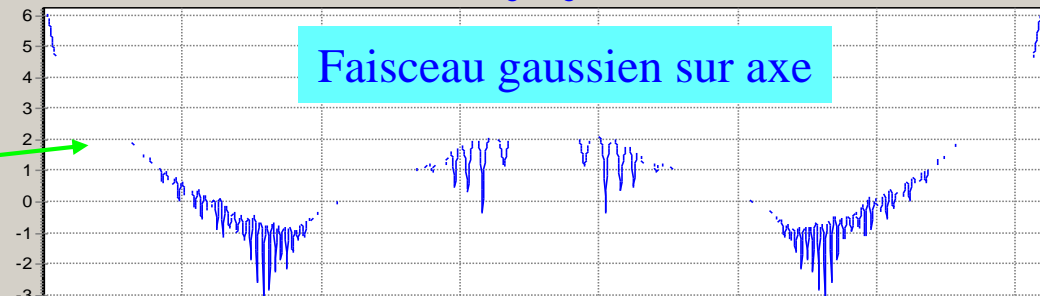


Scattering diagram

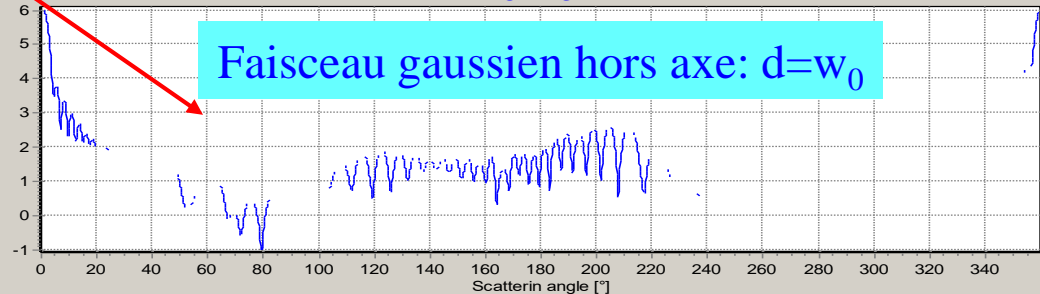

Example results and conclusions

Scattering by s infinite cylinder:

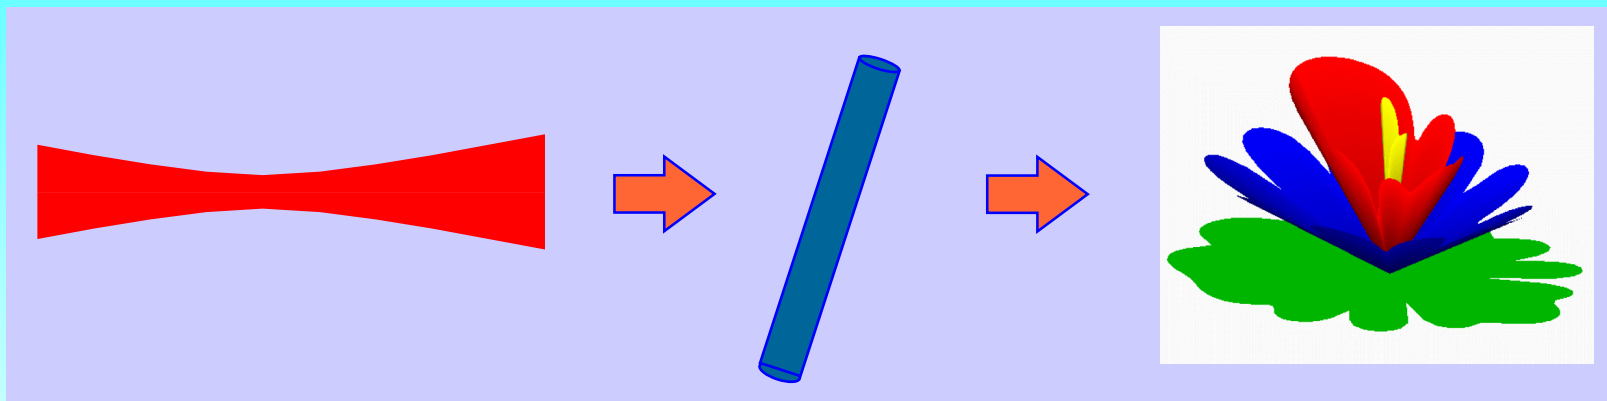

$$\begin{array}{c} E_i \\ H_i \end{array} \leftrightarrow \begin{array}{c} I_{n, TM}(\gamma) \\ I_{n, TE}(\gamma) \end{array} + \begin{array}{c} a_{nI}, a_{nII} \\ b_{nI}, b_{nII} \end{array} \rightarrow \begin{array}{c} E_s \\ H_s \end{array} \quad I$$

Spectral of plane wave

Exemplated results and conclusions

Scattering by spheroid:

$$\mathbf{E}^{(i)} = \sum_{m=-\infty}^{\infty} \sum_{n=|m|, n \neq 0}^{\infty} i^{n+1} \left[iG_{n,TE}^m \mathbf{M}_{mn}^{(i)}(c_1; \xi, \eta, \phi) + G_{n,TM}^m \mathbf{N}_{mn}^{(i)}(c_1; \xi, \eta, \phi) \right],$$

$$\mathbf{H}^{(i)} = -\frac{ik_1}{\omega\mu_0} \sum_{m=-\infty}^{\infty} \sum_{n=|m|, n \neq 0}^{\infty} i^{n+1} \left[G_{n,TM}^m \mathbf{M}_{mn}^{(i)}(c_1; \xi, \eta, \phi) + iG_{n,TE}^m \mathbf{N}_{mn}^{(i)}(c_1; \xi, \eta, \phi) \right]$$

$$G_{n,TE}^m = \frac{1}{N_{|m|n}(c_1)} \sum_{r=0,1}^{\infty} ' g_{r+|m|,TE}^m \frac{2(r+2|m|)!}{(r+|m|)(r+|m|+1)r!} d_r^{|m|n}(c_1)$$

$$G_{n,TM}^m = \frac{1}{N_{|m|n}(c_1)} \sum_{r=0,1}^{\infty} ' g_{r+|m|,TM}^m \frac{2(r+2|m|)!}{(r+|m|)(r+|m|+1)r!} d_r^{|m|n}(c_1)$$

- The vector potential given in combined form not separate odd and even function
- gnm can not be calculated by Localized approximation for oblique incidence

Exampled results and conclusions


Scattering of a pulse beam by a sphere:

Internal field


Homogeneous sphere

$d=40 \mu\text{m}$, $\tau=50 \text{ fs}$


Gaussian beam

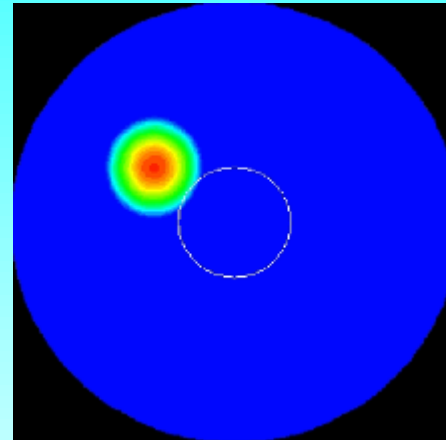


$t = -120$

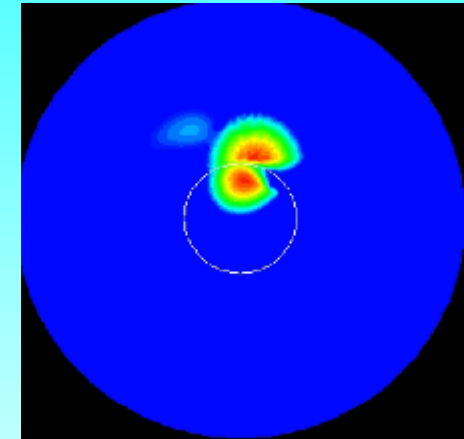


$t = 20$

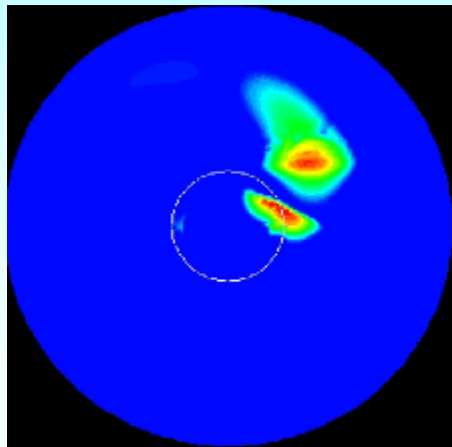

$t = 120$

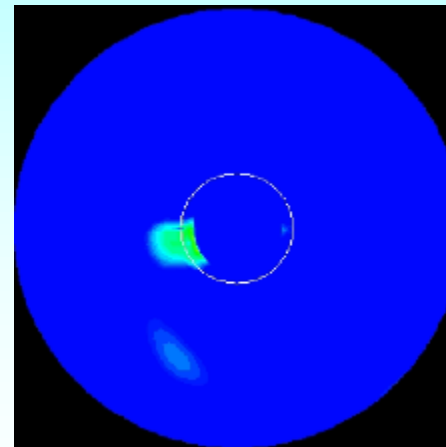

$t = 1080$

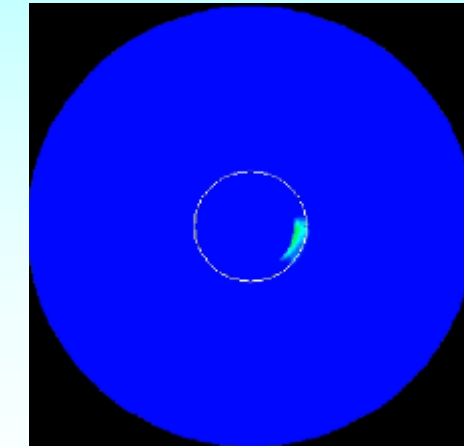

$t = 3400$

Exampled results and conclusions

